

Electric Vibrators


B-Series Three Phase Two Pole

COUGAR



DIMENSIONS (Inch)

Model	A	B	C	Bolt Pattern		Bolt Size	Weight Lbs.
				D	E	F	
B3-237-0A-2	8.625	4.938	5.313	2.375 - 4.500	4.188	0.313	12.375
B3-500-1A-2	11.625	7.750	8.313	5.000	6.000	0.500	37.000
B3-1000-1A-2	11.625	7.750	8.313	5.000	6.000	0.500	39.000
B3-2500-2A-2	13.000	8.938	9.313	5.500	7.000	0.625	54.000
B3-3500-2A-2	13.000	8.938	9.313	5.500	7.000	0.625	57.000
B3-5000-3-2	16.250	10.750	11.000	6.000	8.000	0.750	127.000
B3-6600-3-2	16.250	10.750	11.000	6.000	8.000	0.750	129.000
B3-6600-4-2	20.375	13.375	13.125	8.000	10.000	1.000	254.000
B3-8800-4-2	20.375	13.375	13.125	8.000	10.000	1.000	274.000
B3-11000-5-2	24.000	14.813	15.313	9.000	12.000	1.000	350.000

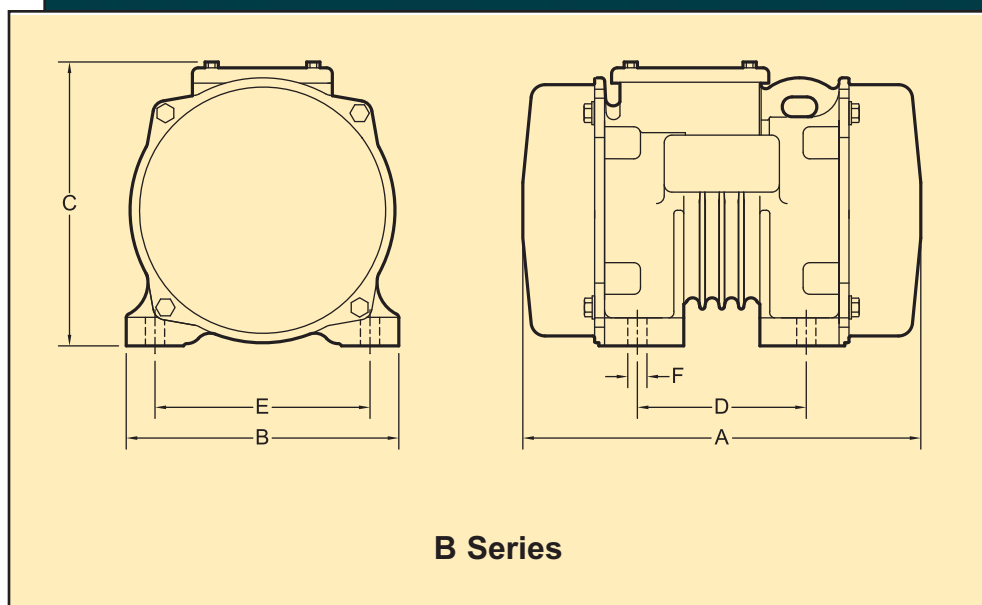

PERFORMANCE DATA

Model	In Lbs.	RPM	Force Lbs.	Amps			HP
				230 Volt	460 Volt	575 Volt	
B3-237-0A-2	0.64	3600	237	0.40	0.20	--	4/25
B3-500-1A-2	1.50	3450	500	1.40	0.70	0.40	1/3
B3-1000-1A-2	3.00	3450	1000	1.40	0.70	0.40	1/3
B3-2500-2A-2	7.40	3450	2500	2.80	1.40	--	3/4
B3-3500-2A-2	10.40	3450	3500	2.80	1.40	--	1
B3-5000-3-2	14.80	3450	5000	8.40	4.20	--	3
B3-6600-3-2	19.50	3450	6600	8.40	4.20	--	3
B3-6600-4-2	19.50	3450	6600	5.00	2.50	--	2
B3-8800-4-2	26.00	3450	8800	11.60	5.80	--	5
B3-11000-5-2	32.50	3450	11000	11.60	5.80	4.60	5

For the mounting and operation instructions on Electric Vibrators see our form 710



COUGAR
INDUSTRIES, INC.®

3600 Cougar Drive,
Peru, Illinois 61354-9336

Toll Free: 800-262-2106
Phone: 815-224-1200
Fax: 815-224-1241

www.cougarindustries.com

Form TB-B3/2-001a