






Air Vibrators

COUGAR



DIMENSIONS (Millimeter)


Model	A	B	C	Bolt Pattern		Bolt Size		Port NPT		Weight kg
				D	E	F	G			
AA4-3300	259	254	168	--	203	16	3/8"			18.3
NPQ-170	295	271	286	51	203	16	1/2"			35.6
NPQ-175	295	271	286	51	203	16	1/2"			38.1
AC4-3000	305	241	262	--	--	--	3/8"			20.2
AC3-3500	305	241	262	--	--	--	3/8"			22.7
AL4-3000	305	213	267	32	159	--	3/8"			25.9
AL3-3500	305	213	267	32	159	--	3/8"			26.5
AA15-2600	170	229	124	--	178	16	--			10.4
AC15-2600	171	173	122	--	--	--	--			7.7
AC11-5000	183	241	230	--	--	--	--			14.5
AC11-5000-S	217	241	230	--	--	--	--			16.2
AC11-6500	183	241	230	--	--	--	--			16.3

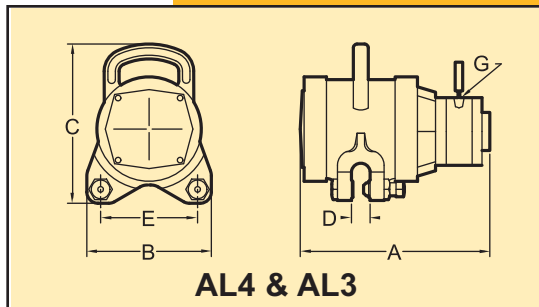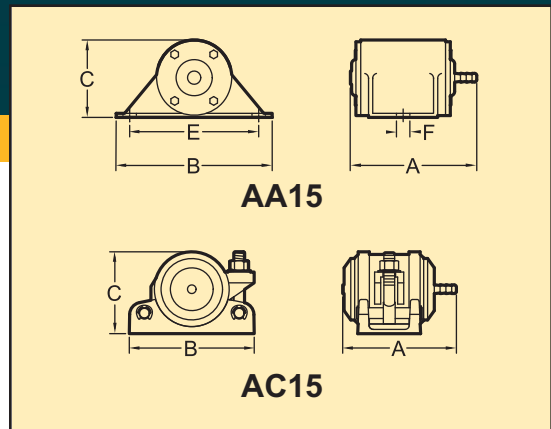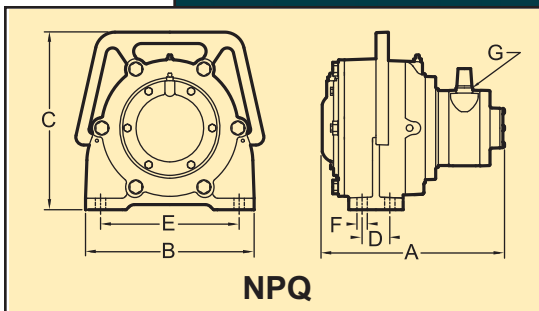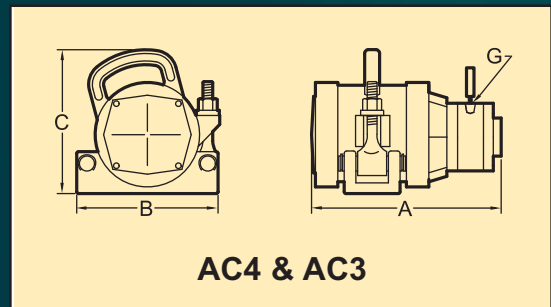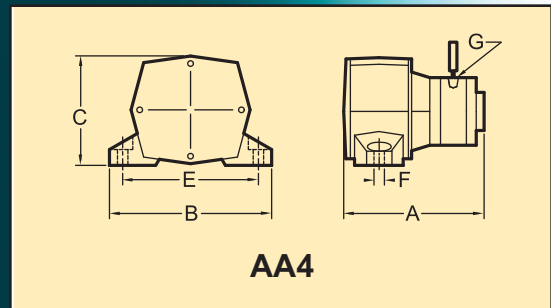

For the mounting and operation instructions on Air Vibrators see our form 703

PERFORMANCE DATA

Model	kg cm	40 PSI			60 PSI			MAX 80 PSI		
		VPM	Force (N)	Ltr/Min	VPM	Force (N)	Ltr/Min	VPM	Force (N)	Ltr/Min
AA4-3300	6.60	3600	9332	566	4800	16591	1133	5600	22582	1841
NPQ-170	14.40	2500	9869	1444	3000	14212	1699	3500	19344	2294
NPQ-175	28.80	2000	12633	1586	2500	19739	1699	3000	28424	2549
AC4-3000	5.80	2750	4777	425	4400	12229	1133	5000	15791	1841
AC3-3500	11.60	2000	5104	368	3300	13895	1133	3800	18424	1557
AL4-3000	5.80	2750	4777	425	4100	10618	1133	58000	15791	1841
AL3-3500	11.60	2000	5104	368	3300	13895	1133	3800	18424	1557
AA15-2600	0.60	8645	5193	765	10498	7657	850	12350	10597	1076
AC15-2600	0.60	8645	5193	765	10498	7657	850	12350	10597	1076
AC11-5000	1.60	9980	17615	1048	12115	25959	1161	14250	35914	1472
AC11-5000-S	5.00	5670	17464	963	6885	25751	1076	8100	35640	1359
AC11-6500	2.50	9800	26692	1189	11900	39357	1303	14000	54473	1671

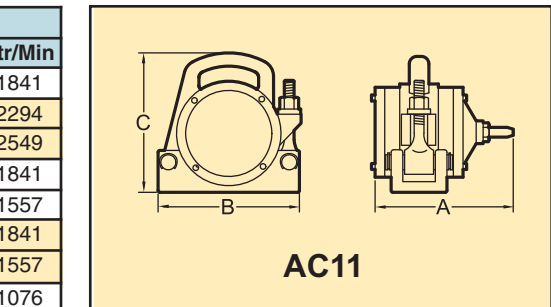

COUGAR
INDUSTRIES, INC.

3600 Cougar Drive,
Peru, Illinois 61354-9336

Toll Free: 800-262-2106
Phone: 815-224-1200
Fax: 815-224-1241

www.cougarindustries.com

Form TB-AIR-001b